



UN2.5-12 (12V2.5Ah/20hr)

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and thus immobilized.

Should the battery be accidentally overcharged producing hydrogen and oxygen, Special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.

Battery Construction


| | | | | | | | | |
|--------------|----------------|----------------|-----------|-------|--------------|----------|------------|---------------|
| Component | Positive plate | Negative plate | Container | Cover | Safety valve | Terminal | Separator | Electrolyte |
| Raw material | Lead dioxide | Lead | ABS | ABS | Rubber | Copper | Fiberglass | Sulfuric acid |

General Feature

- Absorbent Glass Mat(AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

SPECIFICATION

| | | |
|------------------------|-------|-----------|
| Nominal voltage | | 12V |
| Number of cell | | 6 |
| Length(mm/inch) | | 105/4.13 |
| Width(mm/inch) | | 48/1.89 |
| Height(mm/inch) | | 70/2.76 |
| Total Height(mm/inch) | | 70/2.76 |
| Approx. Weight(kg/lbs) | | 0.85/1.87 |

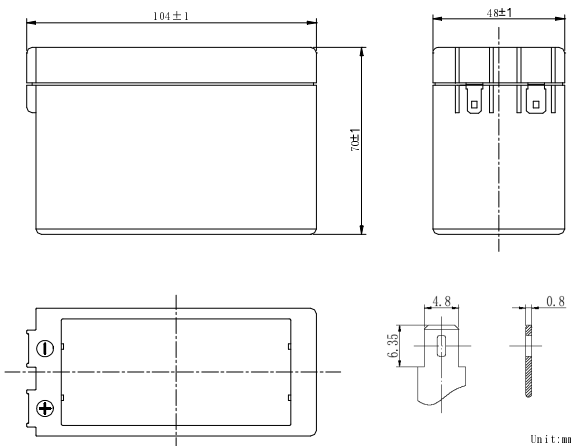

Performance Characteristics

| | | |
|---|--|-------|
| Capacity 77°F(25°C) | 20 hour rate (0.125A、10.5V) | 2.5Ah |
| | 10 hour rate (0.22A、10.5V) | 2.2Ah |
| | 5 hour rate (0.42A、10.5V) | 2.1Ah |
| | 1 hour rate (1.5A、9.6V) | 1.5Ah |
| Internal Resistance | Full charged Battery77°F(25°C):45mΩ | |
| Capacity affected by Temperature (20 hour rate) | 104° F(40°C) | 102% |
| | 77° F(25°C) | 100% |
| | 32° F(10°C) | 85% |
| | 5° F(-15°C) | 65% |
| Self-Discharge 68°F(20°C) | Capacity after 3 month storage | 90% |
| | Capacity after 6 month storage | 80% |
| | Capacity after 12month storage | 60% |
| Max. discharge current77°F(25°C): 37.5A(5S) | | |
| Charge (Constant Voltage) | Float: 13.6~13.8 V/77° F(25°C) | |
| | Cycle:14.5~14.9 V/77°F(25°C) Max. Current: 0.625A | |









Discharge Constant Current (Amperes at 77° F25 °C)

| End Point Volts/Cell | 5min | 10min | 15min | 30min | 1h | 3h | 5h | 10h | 20h |
|----------------------|------|-------|-------|-------|------|------|------|------|-------|
| 1.60V | 9.85 | 6.85 | 4.90 | 2.60 | 1.50 | 0.68 | 0.45 | 0.23 | 0.127 |
| 1.65V | 9.45 | 6.60 | 4.70 | 2.50 | 1.46 | 0.66 | 0.44 | 0.23 | 0.127 |
| 1.70V | 9.00 | 6.30 | 4.45 | 2.38 | 1.41 | 0.63 | 0.43 | 0.22 | 0.126 |
| 1.75V | 8.50 | 5.95 | 4.20 | 2.26 | 1.36 | 0.60 | 0.42 | 0.22 | 0.125 |
| 1.80V | 7.90 | 5.55 | 3.90 | 2.13 | 1.30 | 0.56 | 0.40 | 0.21 | 0.123 |

Discharge Constant Power (watts at 77° F 25 °C)

| End Point Volts/Cell | 5min | 10min | 15min | 30min | 45min | 1h | 2h | 3h | 5h |
|----------------------|------|-------|-------|-------|-------|------|------|------|------|
| 1.60V | 17.8 | 12.7 | 9.35 | 5.12 | 3.95 | 2.95 | 1.78 | 1.25 | 0.88 |
| 1.65V | 17.1 | 12.2 | 9.05 | 4.95 | 3.82 | 2.87 | 1.74 | 1.22 | 0.86 |
| 1.70V | 16.3 | 11.6 | 8.73 | 4.77 | 3.68 | 2.77 | 1.69 | 1.18 | 0.84 |
| 1.75V | 15.4 | 11.0 | 8.38 | 4.57 | 3.53 | 2.67 | 1.64 | 1.14 | 0.81 |
| 1.80V | 14.3 | 10.3 | 8.00 | 4.35 | 3.36 | 2.55 | 1.58 | 1.09 | 0.78 |

(Note)The above characteristics data are average values obtained Within three charge/discharge cycles not the minimum values.

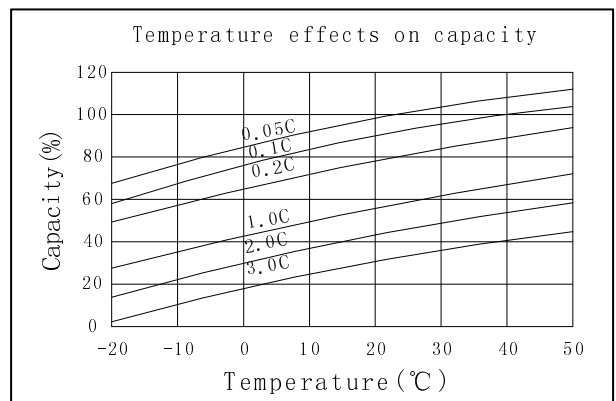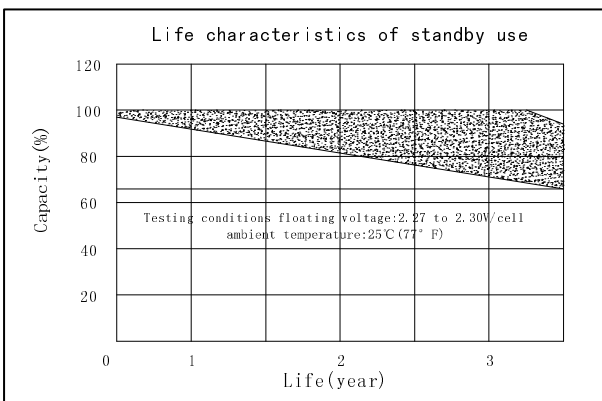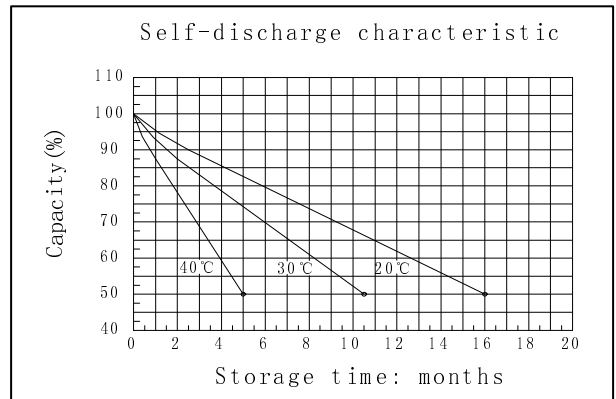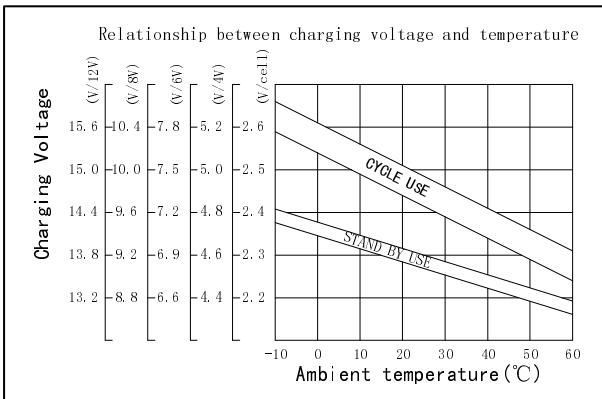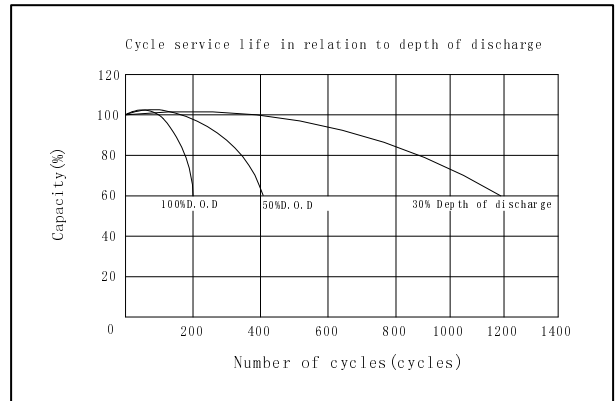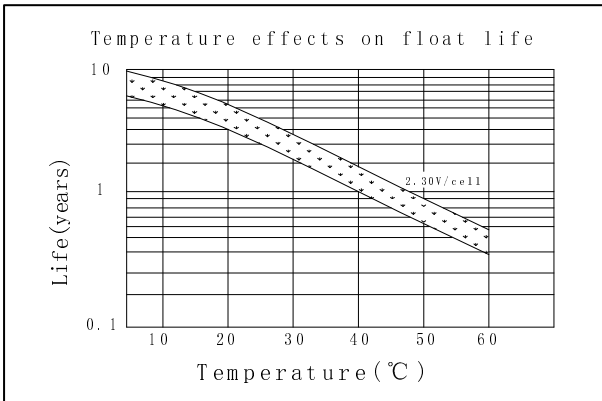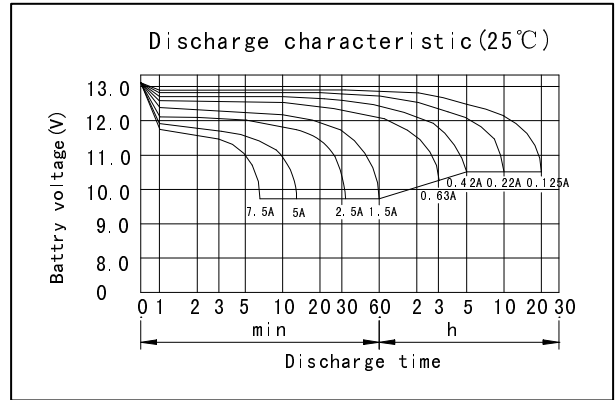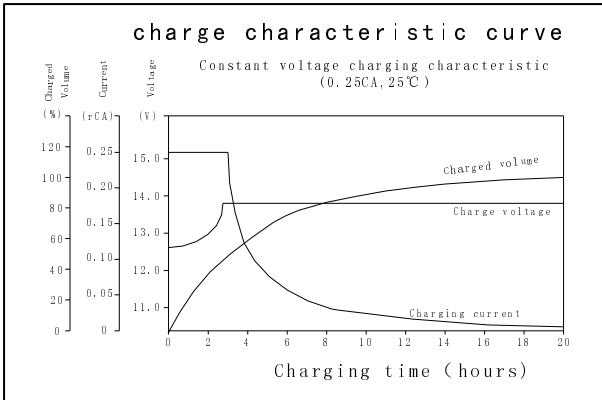

OREMA POWER CO., LTD

Add: Datang Industry Park Xinfeng Ganzhou City, Jiangxi Province, China

TEL: +86-0797-2299669 +86-0797-2299553

FAX: +86-0797-2299553



www.oremabattery.com